


**REPLACEMENT
OXY-FUEL
CUTTING TIPS
SUITABLE FOR
MODEL
MESSER® GRICUT®
1280**

THERMACUT INTRODUCES REPLACEMENT OXY-FUEL CUTTING TIPS SUITABLE FOR MODEL MESSER® GRICUT® 1280

Description: two-piece standard cutting tip for cutting above 100 mm.
Gases: oxygen - propane, natural gas, mixed gases.

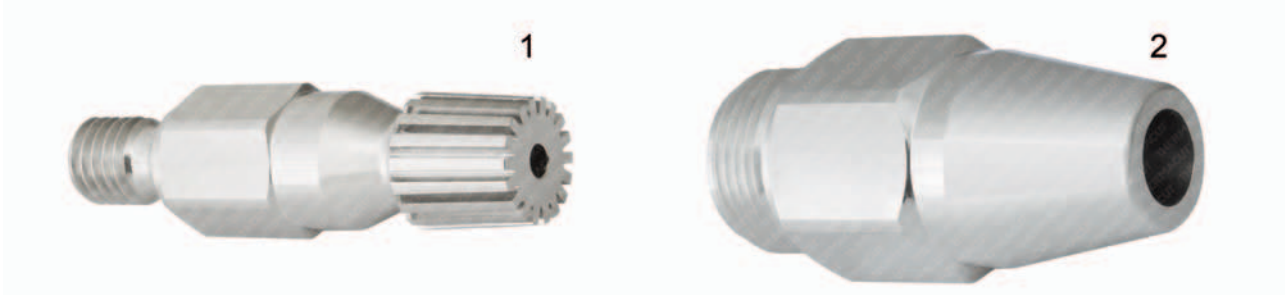

Item	Part No.	Ref. No.	Description, plate thickness	Packing
1.	A-1337	716.15927	Cutting Tip 100–200 mm	5pcs
	A-1338	716.15928	Cutting Tip 200–250 mm	5pcs
	A-1339	716.15929	Cutting Tip 250–300 mm	5pcs
2.	A-1340	716.15931	Heating Nozzle 100–300 mm	1pc

PRODUCTION TECHNOLOGY

- Production processes have been adapted to achieve the best quality of flutes and oxygen orifice with regard to this consumer item.
- There is also special covering to improve service life of this consumables.
- Against competition we modified some dimensions to improve function and quality of kerf.
- Every new prototype is ranked into hard testing process. Only after this process the cutting nozzles will be available to customers.

WHY SHOULD YOU COOPERATE WITH THERMACUT?

- Our products are manufactured on latest generation of CNC equipment, and products are equal to OEM quality, but are available at a more reasonable cost.
- Our experienced international engineering development team and technicians also allows Thermacut to completely guarantee its products.

This approach has made Thermacut one of the most successful companies in the replacement of thermal cutting consumables and torches worldwide.